


BEST AVAILABLE COPY



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 026 719 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
09.08.2000 Bulletin 2000/32

(51) Int Cl.7: H01H 71/74

(21) Application number: 00300716.8

(22) Date of filing: 31.01.2000

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• Reichard, Matthias
24523 Neumunster (DE)
• Felden, Walter
24539 Neumunster (DE)

(30) Priority: 01.02.1999 DE 19903911

(71) Applicant: AEG Niederspannungstechnik GmbH
& Co. KG
24531 Neumünster (DE)

(74) Representative: Goode, Ian Roy et al
GE LONDON PATENT OPERATION,
Essex House,
12/13 Essex Street
London WC2R 3AA (GB)

(54) Tripping device for switches and switching contact arrangement

(57) A tripping device for switches (1) is equipped with a magnet yoke (16), an armature element (18) that works herewith to actuate a tripping shaft (14), and a lever element (23) that can be tilted about the axis (15) of the tripping shaft for adjusting the distance (L) between the magnet yoke and the armature element. This

tripping device finds application in a switch contact arrangement with a plurality of switch contacts (1) arranged adjacent to one another wherein the lever element (23) consists of an adjusting shaft that extends parallel to the axis (15) of the tripping shaft (14) and on which are arranged a plurality of adjusting arms (24) corresponding to the number of switch contacts.

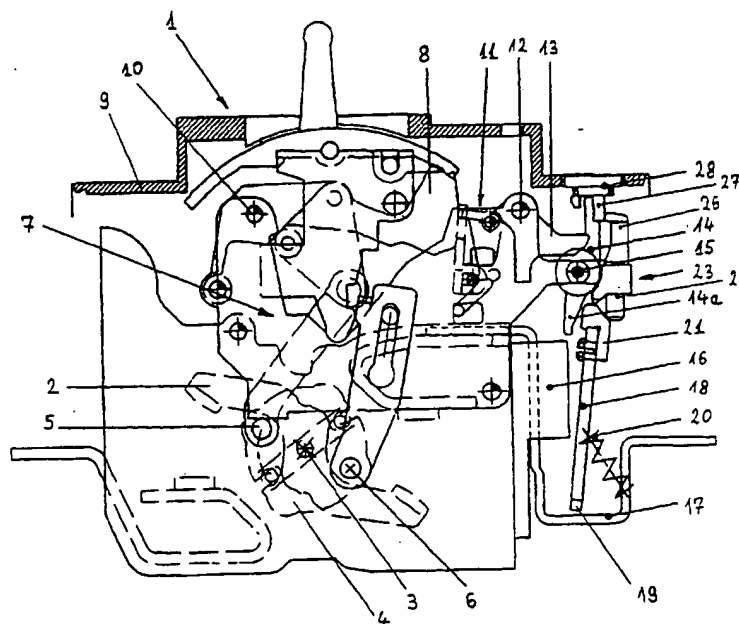


Fig. 1

Description

[0001] The invention relates to a tripping device for switches and also a switch contact arrangement into which is built the tripping device in accordance with the invention.

[0002] Known from the printed document EP-0,620,579 A1 is a tripping device for switches which has a magnetic actuating unit and a lever arrangement connected therewith.

[0003] The object of the invention is to make available a tripping device for switches and a switch contact arrangement which ensure reliable operation, can be easily adjusted, and moreover are of simple and compact construction.

[0004] This object is attained with a tripping device with a magnet yoke, an armature element that works herewith to actuate a tripping shaft, and a lever element that can be tilted about the axis of the tripping shaft for adjusting the distance between the magnet yoke and the armature element.

[0005] The object is further attained with a switch contact arrangement having a plurality of switch contacts arranged adjacent to one another and a tripping device in accordance with the invention, wherein the lever element consists of an adjusting shaft that extends parallel to the axis of the tripping shaft and on which adjusting shaft are arranged a plurality of adjusting arms corresponding to the number of switch contacts. Advantageous embodiments of the invention are defined in the dependent claims.

[0006] The invention is described below with the aid of an exemplary embodiment and with reference to the drawings.

[0007] They show:

Fig. 1: a switch with a built-in tripping device;

Fig. 2: an isolated view of the tripping device in Fig. 1; and

Fig. 3: a perspective view of the switch shown in Fig. 1, which is built into a switch arrangement.

[0008] A switch 1 equipped with the tripping device in accordance with the invention is shown in Fig. 1. This switch 1 has a movable contact 2, which is mounted on the axis 3 of an actuating shaft 4 such that it can rotate. The actuating shaft 4 itself is mounted in a terminal housing (not shown) and has two diametrically opposed satellite axes 5 and 6, which are also rotated about the axis 3 when the actuating shaft 4 rotates. The axis 5 is the point of engagement for a linkage 7, which is connected to a latch 8. The latch 8 is mounted, such that it can pivot, on an axis 10 positioned on the switch housing 9; in case of an overcurrent or short circuit, the latch 8 is released by a latching mechanism 11 in order to per-

mit the disconnected state of the contact 2 shown in Fig. 1.

[0009] The latching mechanism 11 can be actuated by a tripping lever 13 that pivots about an axis of rotation 12. The other end of the tripping lever 13 is in operative connection with a tripping shaft 14, which is mounted on an axis 15 supported by the switch housing 9. Designed on the tripping shaft 14 is a cam 14a, which can be pivoted clockwise in opposition to the force of a spring 14b wound about the axis 15 in Fig. 1.

[0010] Mounted to the switch housing 9 in the bottom region of the switch is a magnet yoke 16, which encircles an electric bus bar 17 connected to one of the contacts of the switch 1 and is supplied with current by the bus bar. Arranged facing the magnet yoke is an armature element 18 in the form of a flap which is hinge-mounted by means of retaining sections 19 -- shown in detail in Fig. 3 -- to a stationary section of the switch, which is not shown in detail. The flap 18 is additionally connected to a stationary section of the bus bar 17 by a spring 20, which loads the flap in the clockwise direction. In its upper region as shown in Fig. 1, flap 18 is equipped with a clip 21 rigidly mounted thereon, which can be brought into contact with the cam 14a by pivoting of the flap in order to rotate the tripping shaft 14 and thereby actuate the latching mechanism 11 by means of the tripping lever 13 and thus finally initiate the tripping process in switch 1.

[0011] However, the clip 21 can also be formed as one piece with the flap 18, preferably of metal.

[0012] Also mounted on the axis 15, by means of support arms 22 shown in Fig. 3, is a lever element 23. The lever element 23 has an adjusting arm 24 which is equipped with an adjusting screw 25 for calibrating the tripping device, and a stationary lever arm 26 which extends to the side of the adjusting shaft 23 that is diametrically opposite adjusting arm 24. The end of the stationary lever arm 26 is in contact with a cam pin 27 of a rotary knob 28 mounted in a hole in the upper wall of the switch housing 9. The surface of the rotary knob 28 is equipped with a slot 29 to make it possible to adjust the rotary knob with the aid of a suitable tool, such as a screwdriver.

[0013] In the unactuated state of the magnet yoke, which is to say when the contact 2 is closed and an overcurrent is not present, the adjusting screw 25 is in constant contact with an angled surface of the clip 21, which situation is ensured by a tensile force exerted by the spring 20 on the flap 18. In this state, it is possible to change the tilt setting of the lever element and the adjusting shaft 23 with respect to the axis 15 by adjusting the rotary knob 29, and thus adjust the distance L shown in Fig. 2 between the flap 18 and the magnet yoke 16. In this way the current at which the tripping device responds can be defined indirectly.

[0014] An important advantage of the tripping device according to the invention explained above is that an extremely reliable adjustment mechanism is guaran-

teed by the interaction of the adjusting shaft 23 that is arranged, such that it can tilt, on the axis 15 of the tripping shaft 14 and the rotary knob that interacts therewith via a cam pin. Moreover, this mechanism is easy to produce and is compact in design. The tripping device in accordance with the invention thus has only a few elements, which can be accommodated in a space-saving manner laterally in the switch.

[0015] The switch equipped with a tripping device shown in Figures 1 and 2 is characterized by the following method of operation:


[0016] First, a person adjusting the switch 1 by turning rotary knob 28 sets the precise tilt position of the lever element 23 on the axis 15 and thus the distance between the flap 18 and the magnet yoke 16, as shown in detail in Fig. 2. This is a fine adjustment as a function of the relatively greater length of the stationary lever arm 26 as compared to the adjustable arm 24. It must be noted here that a coarser adjustment of the distance L between the magnet yoke 16 and the flap 18 has been accomplished by turning the adjusting screw 25 during installation of the tripping device in the switch housing 9.

[0017] In the case of a short circuit, an overcurrent naturally occurs, which flows through the electric bus bar 17. This activates the magnet yoke 16 to the extent that when a specific current is exceeded, the magnetic force generated by the magnet yoke is sufficient to attract the flap 18 in opposition to the tensile force exerted by the spring 20. In the course of the resulting pivoting motion of the flap 18, the cam 14a is pivoted clockwise in Fig. 1 by the clip 21 until the tripping lever 13 is actuated. Actuation of the tripping lever 13 then tilts the latching mechanism 11 such that it in turn can release the latch 8 for a pivoting motion, upward in Fig. 1, about the axis 10. This motion is caused by a spring which is not shown in detail in Fig. 1. The motion of the linkage 7 that is coupled with the pivoting motion of the latch 8 brings about a rotation of the actuating shaft 4 by means of the axis 5, and thus finally a disconnection of the movable contact 2 from the contact bus bars.

[0018] As shown in Fig. 3, the tripping device can also be used in a switch contact arrangement of switch contacts arranged next to each other in a row. To this end, the lever element takes the form of an adjusting shaft that extends along the row of switch contacts, parallel to the axis of the tripping shaft 14, and on which are arranged several adjusting arms 24 corresponding to the number of switching contacts. Formed on the adjusting shaft 23 is one lever arm 26, which is sufficient to actuate the adjusting shaft and the resultant pivoting of the flaps 18. The tripping sensitivity in each switch contact can be adjusted separately by means of the screws carried by each adjusting arm 24. As a result, individual calibration of each switch contact can be undertaken independently of the adjustment of rotary knob 28.

Claims

1. Tripping device for switches (1) with a magnet yoke (16), an armature element (18) that works therewith to actuate a tripping shaft (14), and a lever element (23) that can be tilted about the axis (15) of the tripping shaft for adjusting the distance (L) between the magnet yoke and the armature element.
2. Tripping device in accordance with claim 1, characterized in that the lever element (23) has a stationary lever arm (26) that works in conjunction with the cam pin (27) of a rotary knob (28), and an adjustable-length adjusting arm (24) that works in conjunction with the armature element (18).
3. Tripping device in accordance with claim 2, characterized in that the adjusting arm (24) of the lever element takes the form of an adjustable calibrating screw (25).
4. Switch contact arrangement with a plurality of switch contacts (1) arranged adjacent to one another and a tripping device in accordance with one of claims 2 or 3, characterized in that the lever element (23) consists of an adjusting shaft extending parallel to the axis (15) of the tripping shaft (14), on which adjusting shaft are arranged a plurality of adjusting arms (24) corresponding to the number of switch contacts.
5. Switch contact arrangement in accordance with claim 4, characterized in that the lever arm (26) is arranged diametrically opposite adjusting arm (24) and offset therefrom.

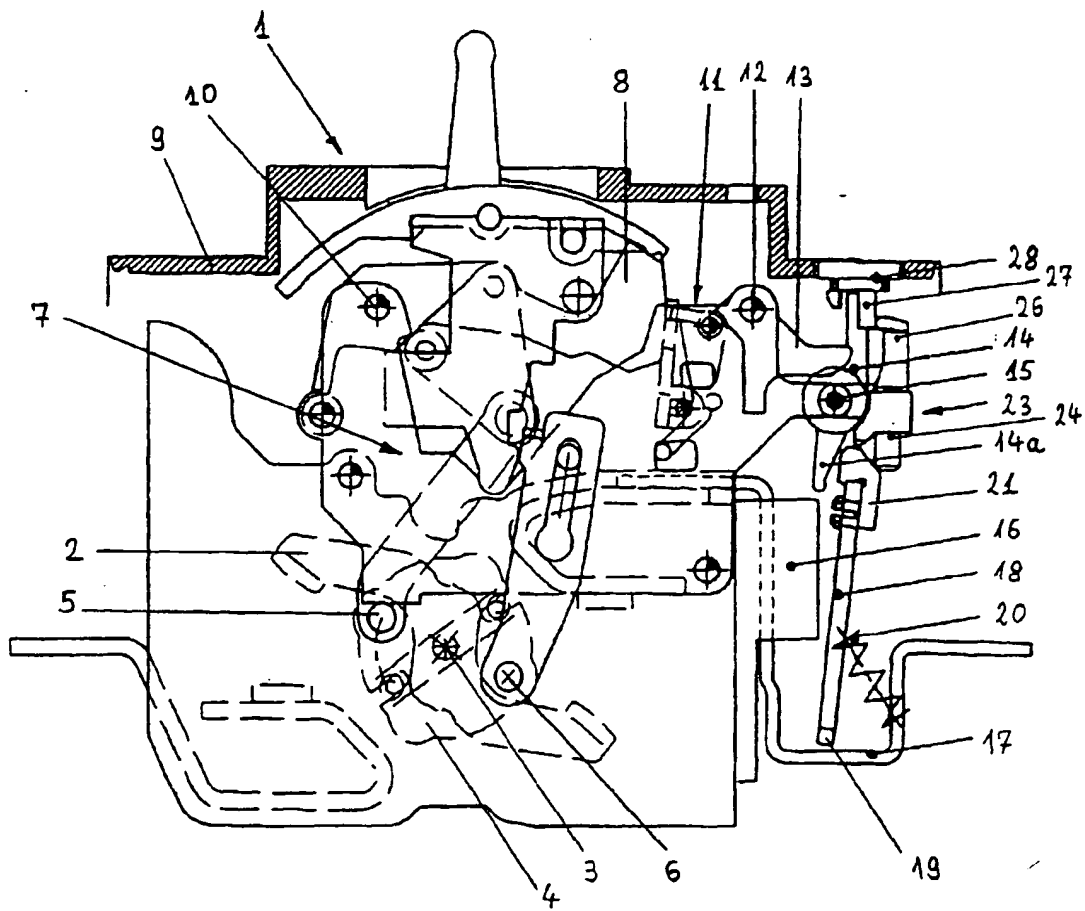

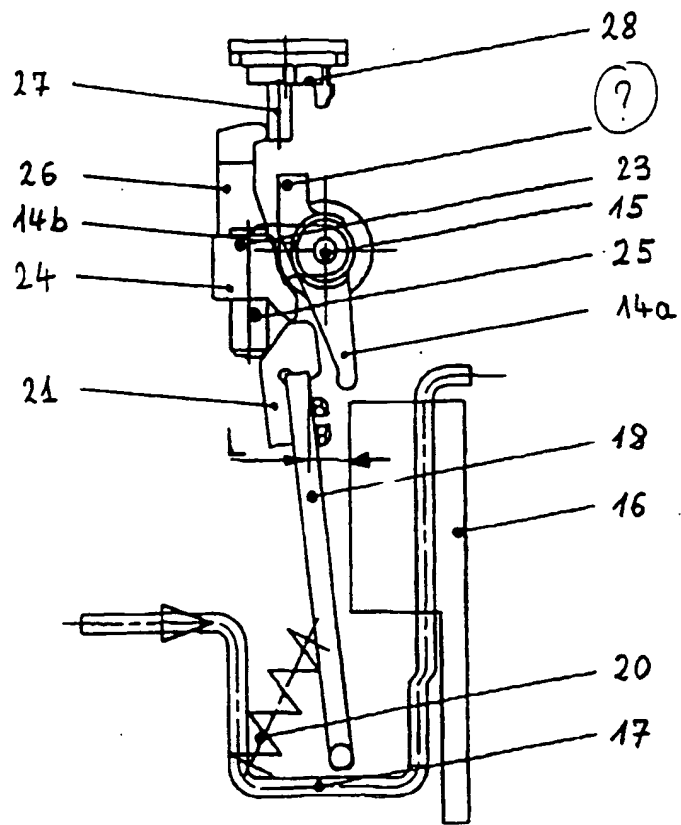


Fig. 2


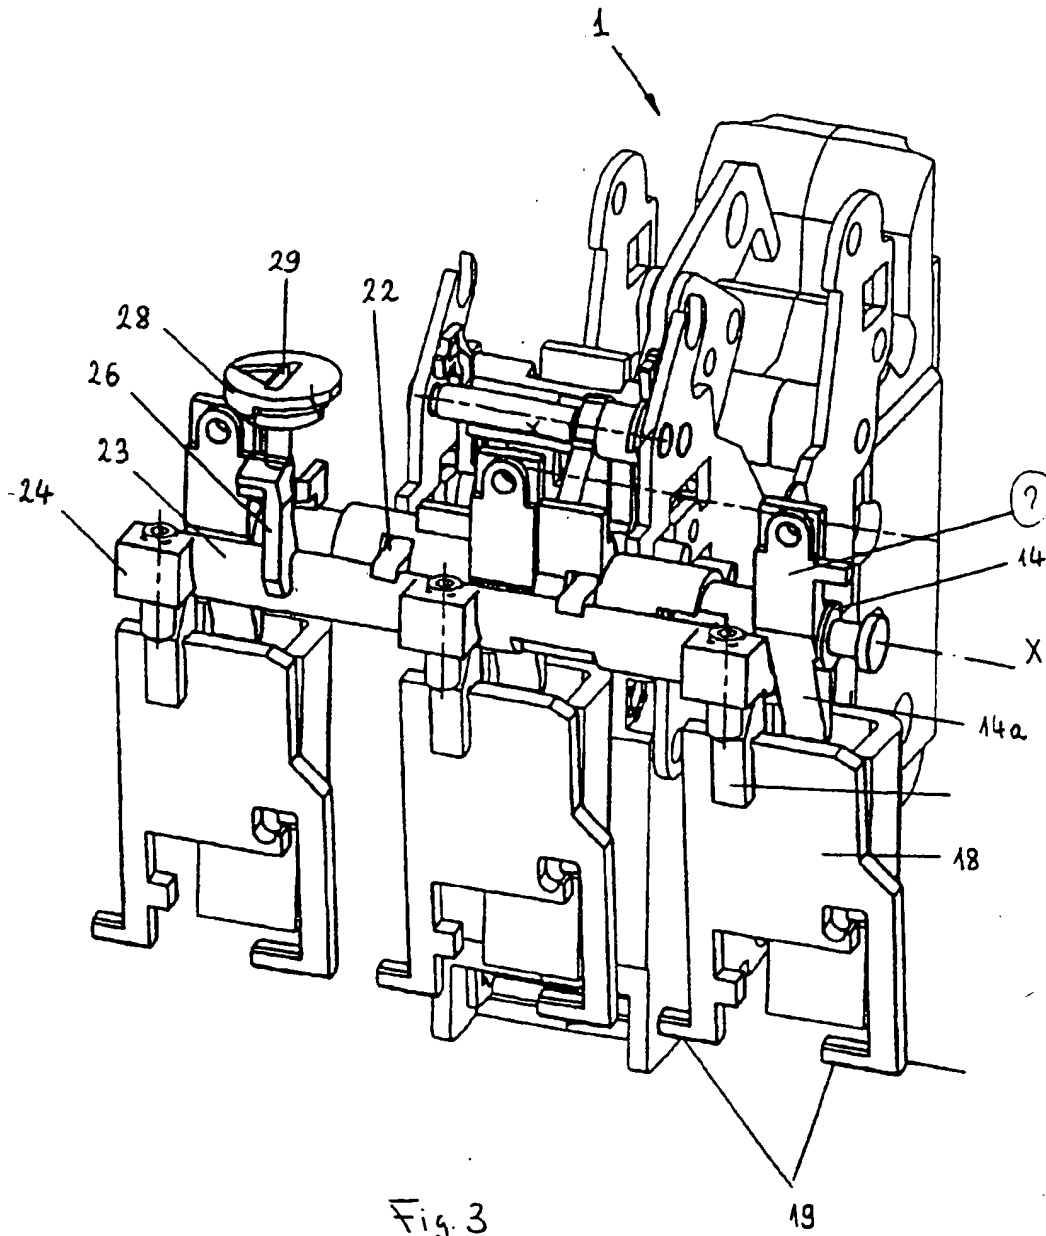


Fig. 3



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 026 719 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
25.04.2001 Bulletin 2001/17

(51) Int Cl.7: **H01H 71/74**

(43) Date of publication A2:
09.08.2000 Bulletin 2000/32

(21) Application number: **00300716.8**

(22) Date of filing: **31.01.2000**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• **Reichard, Matthias**
24523 Neumunster (DE)
• **Felden, Walter**
24539 Neumunster (DE)

(30) Priority **01.02.1999 DE 19903911**

(74) Representative: **Goode, Ian Roy et al**
GE LONDON PATENT OPERATION,
Essex House,
12/13 Essex Street
London WC2R 3AA (GB)

(71) Applicant **AEG Niederspannungstechnik GmbH
& Co KG**
24531 Neumünster (DE)

(54) Tripping device for switches and switching contact arrangement

(57) A tripping device for switches (1) is equipped with a magnet yoke (16), an armature element (18) that works herewith to actuate a tripping shaft (14), and a lever element (23) that can be tilted about the axis (15) of the tripping shaft for adjusting the distance (L) between the magnet yoke and the armature element. This

tripping device finds application in a switch contact arrangement with a plurality of switch contacts (1) arranged adjacent to one another wherein the lever element (23) consists of an adjusting shaft that extends parallel to the axis (15) of the tripping shaft (14) and on which are arranged a plurality of adjusting arms (24) corresponding to the number of switch contacts.

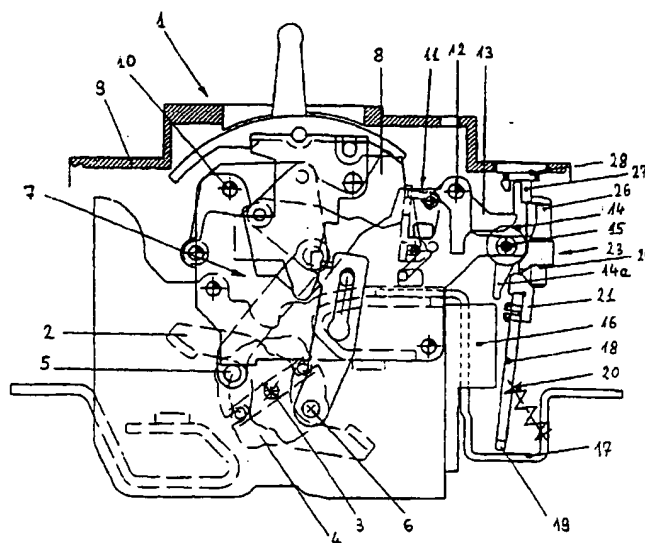


Fig. 1



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 30 0716

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (InCL1.7)
Y	US 3 421 123 A (JOHNSON JOSEPH F ET AL) 7 January 1969 (1969-01-07) * the whole document *	1-5	H01H71/74
Y	US 3 345 591 A (J.H. LEONARD) 3 October 1967 (1967-10-03) * the whole document *	1-5	
A	US 5 258 733 A (LINK DONALD A ET AL) 2 November 1993 (1993-11-02) * column 16, line 13 - column 17, line 24; figures 23,26,27 *	1-5	
A	DE 10 67 514 B (CALOR-EMAG) 22 October 1959 (1959-10-22) * figures 3,6 *	1	
D,A	US 5 467 069 A (PAYET-BURIN JEAN-LUC ET AL) 14 November 1995 (1995-11-14) * figure 3 *	1	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (InCL1.7)
			H01H
Place of search		Date of completion of the search	Examiner
THE HAGUE		26 February 2001	Overdijk, J
CATEGORY OF CITED DOCUMENTS			
<p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons</p> <p>& : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 82 (P04001)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 30 0716

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

26-02-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3421123 A	07-01-1969	NONE	
US 3345591 A	03-10-1967	DE 1588732 B FR 1529259 A GB 1148957 A	21-10-1971 22-11-1968
US 5258733 A	02-11-1993	NONE	
DE 1067514 B		NONE	
US 5467069 A	14-11-1995	FR 2704091 A DE 69403022 D DE 69403022 T EP 0620579 A ES 2104317 T	21-10-1994 12-06-1997 30-10-1997 19-10-1994 01-10-1997

EPO FLUPTM P0449

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82